
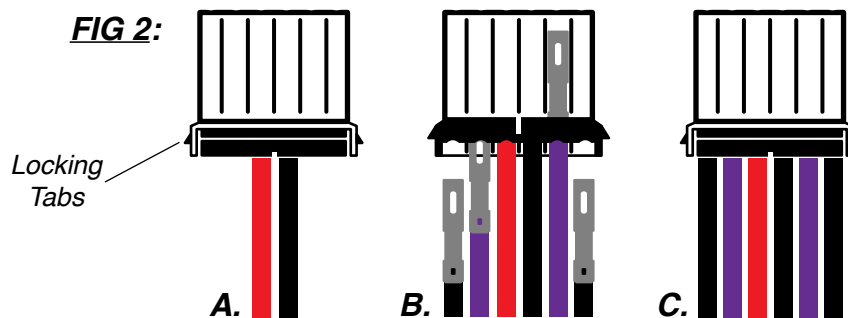


BAGGER AUDIO™

OEM FAIRING (SPEAKERS / AMP) UPGRADE KIT

WIRING DIAGRAM

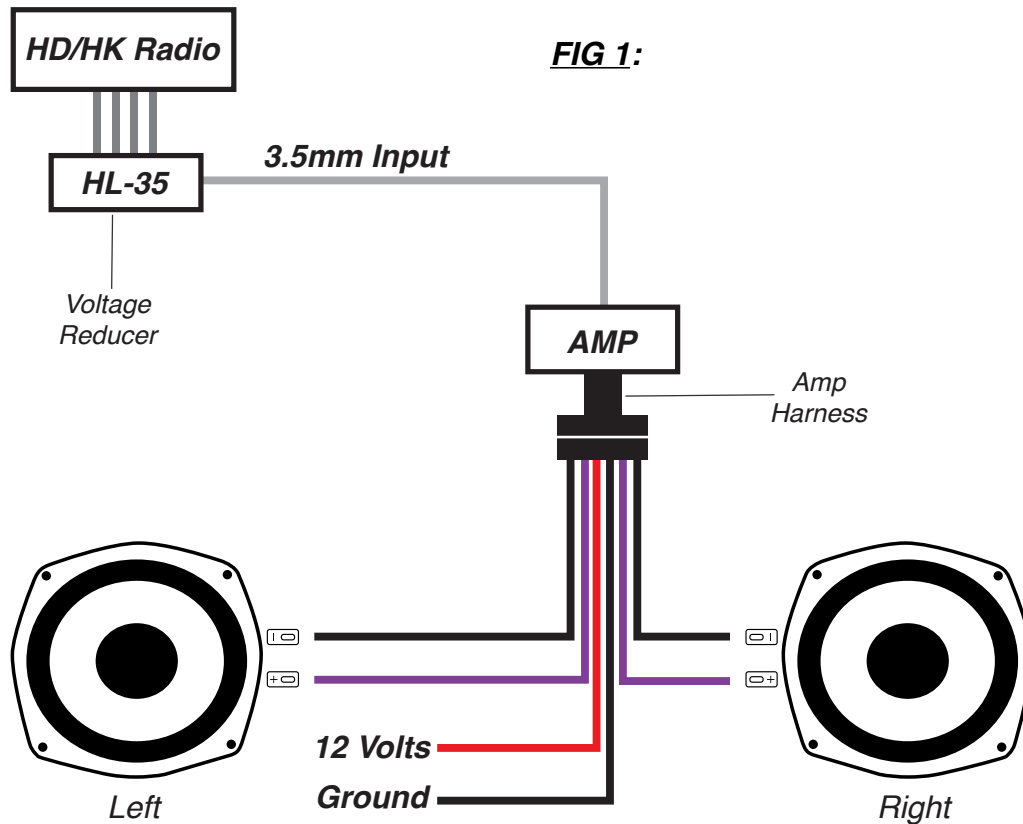

Use the above **FIG 1** to connect the amp harness to power and ground and the right and left speakers. Use **FIG 2 (A, B, C)** to follow the wire color configuration when connecting your speakers to the amp harness plug. **FIG 2 (A)** shows the connector with the locking door closed. Depress the locking tabs on each side to open the locking door before inserting the speaker wires. **FIG 2 (B)** shows the locking door open and the correct orientation for inserting the wire leads. When inserted correctly the wire leads should snap into place so they cannot be easily removed. Once all wires have snapped into place close the locking door and connect plug to amp harness plug. The finished plug should look like **FIG 2 (C)**.